


PORTABLE DITCH LIGHT

PDL1001 (R11497)

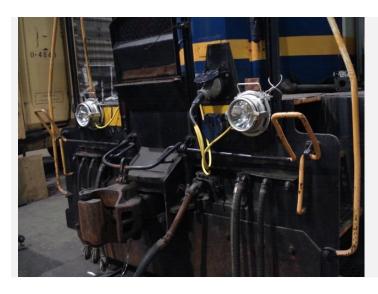

Designed for application to yard switcher locomotives without necessary ditch lights per TC and FRA rules.

Long Hood End:

The portable ditch lights operate on the long hood end when the reverser handle is placed in the reverse position.

Short Hood End:

The portable ditch lights operate on the short hood end when the reverser handle is placed in the forward position.

Operation:

The portable ditch lights turn off when the reverser is placed in neutral (center position). The ditch light housings are magnetic for easy application to the locomotive. A safety cable is supplied as a secondary attachment device. This prevents the ditch light from falling to the ground if it is jarred suddenly or otherwise knocked off the locomotive.

Replacement Bulbs:

Halogen AHQV56-75V-350WCS (R11250)